

PRO-FIL	Datasheet	
DOC 40-10	PRO-FIL DFP-Spezial	Ver. 1.0

Production: 2 extruded aluminium profiles, for stainless steel version from profiled strip filled with pro-fil.flex (silicone- and water-free 1-component MS polymer)

Colors: any RAL, Sikkens and NCS colour


Perforation: Installation section with triangular/square punch holes

Length: 2500 mm

Height: 2,2 | 2,8 mm

Visible width (after installation): approx. 9,5 mm

Querschnitt: (Symbolbild)

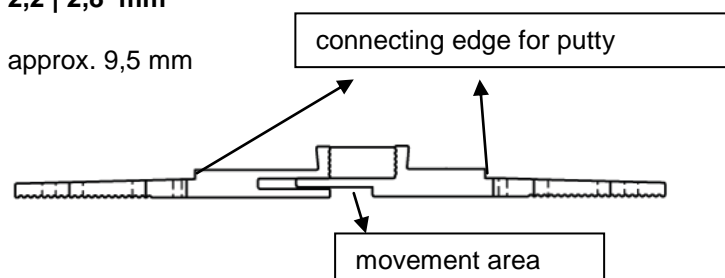

Application: for expansion joints in ceramic, textile and elastic floor coverings

Expansion capability: approx. 3,0 mm

Shore-A hardness: (scope of expansion) approx. 50-65° (depending on the color)

Load bearing capacity: deformation $\leq 0,33$ mm at 500 kg load

These data are based on findings from long series of tests and many years of experience. They are merely meant as information for the user – no legal claims may be derived from this information as we do not know the specific application conditions of the user. The user is solely responsible for inappropriate and incorrect use of our products. We reserve the right to change the product in the interest of technical progress.

Available from:

pro-fil.kunststoff GmbH
Trabenigerstrasse 1
9241 Wernberg
Austria

T: 0043 (0)4252/30201
F: 0043 (0)4252/30201 10

E-Mail: office@pro-fil-kunststoff.com

www.pro-fil-kunststoff.com

pro-fil kunststoff GmbH
Händelstr. 8A
53721 Siegburg
Germany

T: 0049/(0)2241/911 2696
F: 0049/(0)2241/911 2697

E-Mail: siegburg@pro-fil-kunststoff.com