

<b>PRO-FIL</b>	<b>Datasheet</b>	
DOC 40-05	pro-fil.dfp expansion joint profile	Ver. 2.2

**Production:** 2 extruded aluminium profiles, for stainless steel version from profiled strip, joined with pro-fil.flex (silicone- and water-free 1-component MS polymer)

**Colours:** any RAL, Sikkens and NCS colour


**Perforation:** Installation section with triangular punch holes

**Length:** 2500 mm

**Installation height:** **2.2\*** | **2.8\*** | 3.0 | **3.7\*** | 4.5 | 6.0 | 8.0 | 10.0 | 12.5 | 15.0 | 22.0 mm  
\* only for aluminium version

**Visible width (after installation):** approx. 11 mm

**Cross-section:  
(symbol picture)**

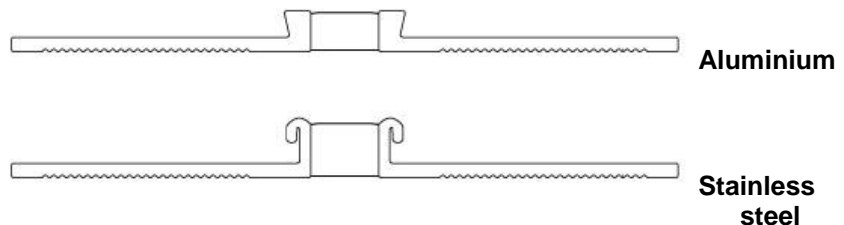

**Application:** for expansion joints in ceramic, textile and elastic floor coverings

**Expansion capability:** approx. 1.5 mm in each direction

**Shore-A hardness:  
(scope of expansion)** approx. 50 - 65° (depending on the colour)

These data are based on findings from long series of tests and many years of experience. They are merely meant as information for the user – no legal claims may be derived from this information as we do not know the specific application conditions of the user. The user is solely responsible for inappropriate and incorrect use of our products. We reserve the right to change the product in the interest of technical progress.

**Available from:**

pro-fil.kunststoff GmbH  
Trabenigerstrasse 1  
9241 Wernberg  
Austria

T: 0043 (0)4252/30201  
F: 0043 (0)4252/30201 10

E-Mail: office@pro-fil-kunststoff.com

W: www.pro-fil-kunststoff.com

pro-fil kunststoff GmbH  
Händelstr. 8A  
53721 Siegburg  
Germany

T: 0049/(0)2241/911 2696  
F: 0049/(0)2241/911 2697

E-Mail: siegburg@pro-fil-kunststoff.com